


VoIP Media Gateway

Front Panel Overview



Rear Panel Overview

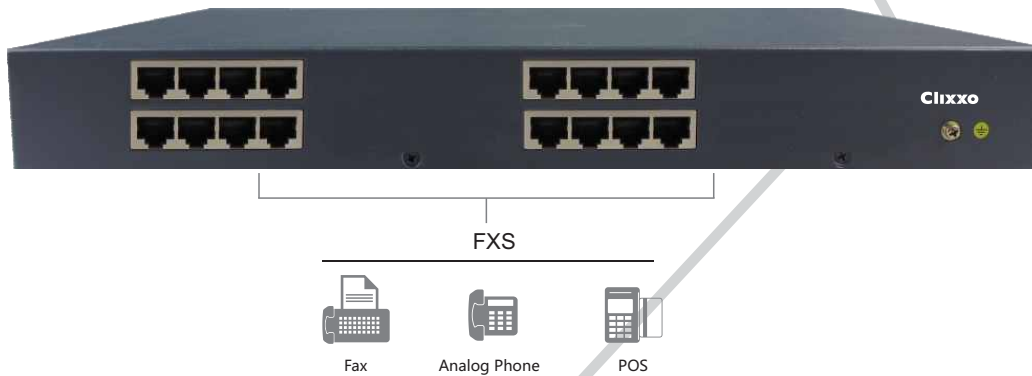

For Scalable & High Performance Communication

CLIXXO VoIP Media Gateway MG60XX Series enables Small, Medium & Large Businesses to keep their existing legacy telephony infrastructure and integrate with VoIP Services and IP PBXs, to create seamless office environments saving organizations time and money in managing communication networks. MG60XX Series is modular in design to offer TDM ports from 16 ports–64 Ports which are fully interoperable with all SIP – Based environments.

- **32 FXS ports**
- **1 Gigabit WAN Port**
- **1 Gigabit LAN Port**
- **Supports Multi VLAN**



MG60XX

Voice Capacity and Functions

Analog User	32 FXS Users
IP Telephony Protocol	TCP/IP, UDP, ARP, ICMP, TELNET, SNMP, HTTP, RTP/RTCP, TFTP, NAT, DHCP, PPPoE
Voice Processing	Voice Codecs: G.711 (A-law, μ -law), G.723.1a, G.729a/b,
Voice Functions	<ul style="list-style-type: none">• Call Forward• Call Transfer• Conference Call• Call Waiting support• Echo Cancellation• Dynamic Jitter Buffer• Voice Activity Detection• IVR• Fax Supported• Voice Mail• Voice logging• Auto Attendant• Audio Conference• Day & Night Mode• Silence detection / suppression• Message Waiting Indication via FSK• Flash hook event Signaling• Caller ID Generation (Name & Number) DTMF or FSK• DTMF detection and generation• Configurable tones (dial, ringing, busy)• Carrier tone detection and generation• Configurable transmit packet length

Data Network

WAN	1x10/100/1000 Base-T Ethernet RJ-45 connector
LAN	1x10/100/1000 Base-T Ethernet RJ-45 connector
WAN Access Mode	<ul style="list-style-type: none">• Static IP Address• DHCP• PPPoE
Networking Interface	<ul style="list-style-type: none">• Bridge Mode• 802.1Q
QoS/SNAT/DNAT/Routing	<ul style="list-style-type: none">• Flow control• DOS/DiffServ• IEEE 802.1p/Q. NAPT• Statefull inspection• Static routes• Source-based routing policy routing• Port forwarding/Triggering• DHCP Client• DHCP Server• PPPoE client,• VLAN support

Management

Networking Protocols	Web GUI
----------------------	---------

Environmental

Dimension (W x D x H)	367mm x 224mm x 44mm
Net Weight	3000g
Operating Voltage/Current	+95VAC~+265VAC / 0.5 A
Operating Temperature / Humidity	0°C~50°C / 10%-90% (Non - Condensing)

* Specifications are subject to change without prior notice

CLIXXO BROADBAND PVT. LTD.

Corporate Office: B-16, Sector - 67, Noida - 201 301, U.P., India

✉ info@clixxo.com 🌐 www.clixxo.com 📞 +91 120 4843450 📠 +91 120 484 3465

▶ Bangalore ▶ Chandigarh ▶ Delhi NCR ▶ Guwahati ▶ Kolkata ▶ Pune ▶ Vadodara
▶ Bhopal ▶ Chennai ▶ Jaipur ▶ Hyderabad ▶ Trivandrum ▶ Vijayawada ▶ Noida